
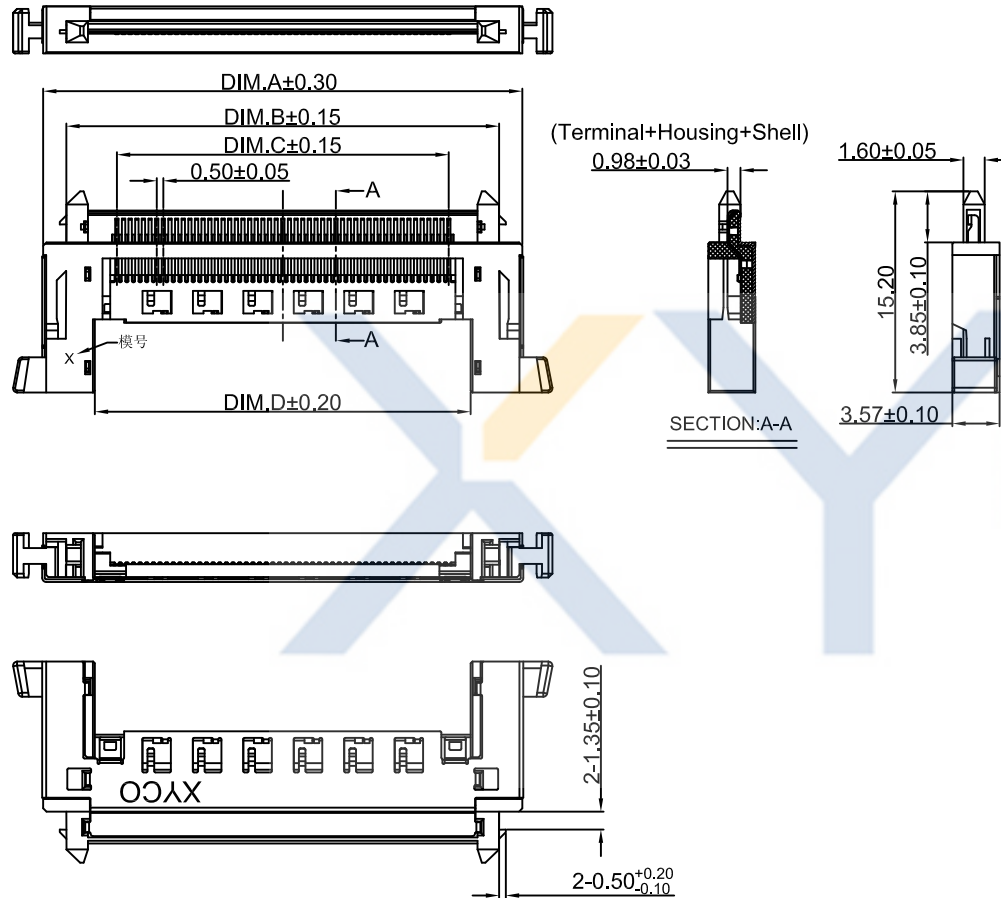


DRAWING FOR CUSTOMER

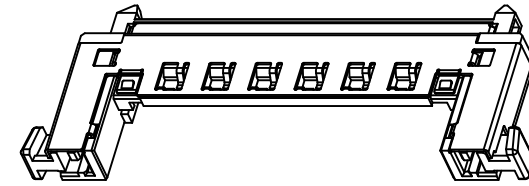

NOTE:

- MATERIAL**
 HOUSING: LCP UL94-V0
 CONTACT: PHOSPHOR BRONZE
 SHELL & LATCH: STAINLESS STEEL
- PLATING:**
 TERMINAL: GOLD PLATED 3u"(MIN) ON CONTACT AREA; MATTE TIN PLATED 50u"(MIN) ON SOLDER AREA; OVER NI PLATED 40u"(MIN)
 BOTTOM & TOP SHELL: MATTE TIN PLATED 50u"(MIN); OVER NI PLATED 40u"(MIN)
- ELECTRONICAL SPECIFICATION:**
 CURRENT RATING: 0.7 AMPERE PER CONTACT
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 100 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC.
 OPERATING TEMPERATURE: -40°C ~ +80°C
 APPLICABLE WIRE: FINE-WIRE COAXIAL #40AWG

KB904-XX H L S 1 A -C2 X

Pin No. Logo
 Housing LCP BK
 With Lock Version
 Mold No.
 Solder

Dimension	A	B	C	D
51 pin	36.10	32.60	25.00	28.30
41 pin	31.10	27.60	20.00	23.30

2019-10-09	A		KB904-XXHLS1A-C2X	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB904-XXHLS1A-C2X
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE190923A

XYCO PRECISION CONNECTORS
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

UNIT 單位	mm	PRODUCT NAME 產品名稱	FI-RE PH:0.5mm XXP Wire To Board Solder Type Connector
------------	----	----------------------	-----------------------------------------------------------