DRAWING FOR CUSTOMER

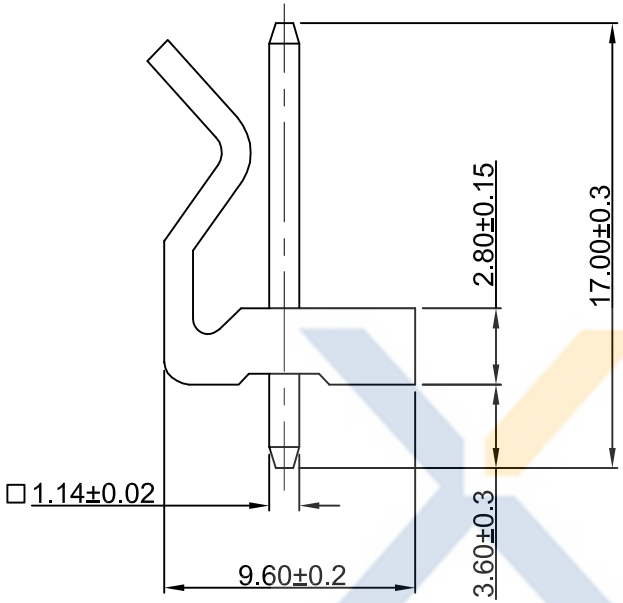

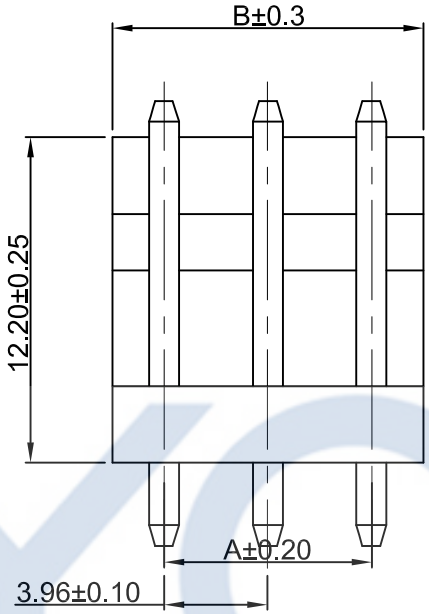

■SPEC.:
- ●Rated Voltage:250V AC,DC
- ●Rated Current:7.0A AC,DC
- ●Withstand Voltage:1500V AC/minute
- ●Contact Resistance:15mΩ max
- ●Insulation Resistance:1000MΩ min
- ●Temperature Range:-25℃~+85℃

■Material
- ●Insulator:Nylon66 UL94-V0
- ●Contact:Brass/Tin-plated

KB965-XX X D V 6 A

- Pin No.
- 包装方式:
  - T:TUBE（管装）
  - R:REEL（卷装）
  - P: PE （袋装）
- D: R:Right Angle / V:Vertical / S:SMT / D:DIP
- Mold No.
- Version

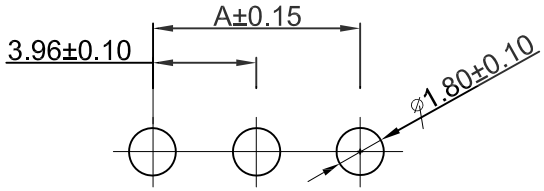

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions(mm)	
	A	B
02	3.96	7.96
03	7.92	11.92
04	11.88	15.88
05	15.84	19.84
06	19.80	23.80
07	23.76	27.76
08	27.72	31.76
09	31.68	35.68
10	35.64	39.64
11	39.60	43.60

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-12-16	A		KB965-XXXDV6A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: Devin
CHECKED 審查: Thomas
APPROVED 核准: William

KB965-XXXDV6A

PART NO. 料號
DWG NO. 圖號: PE1905022A

UNIT 單位: mm

PRODUCT NAME 產品名稱: PH3.96mm Wire To Board Dip Vertical Wafer

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn