
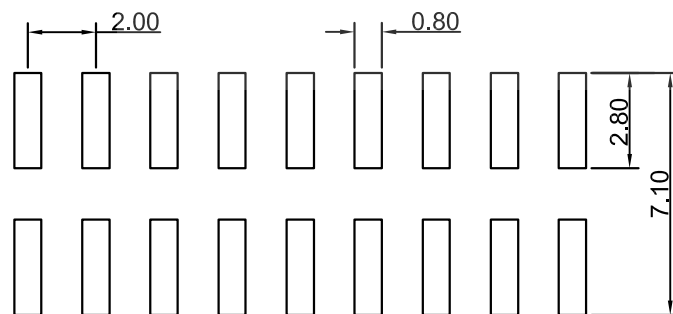
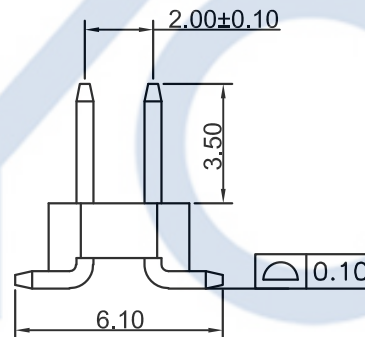
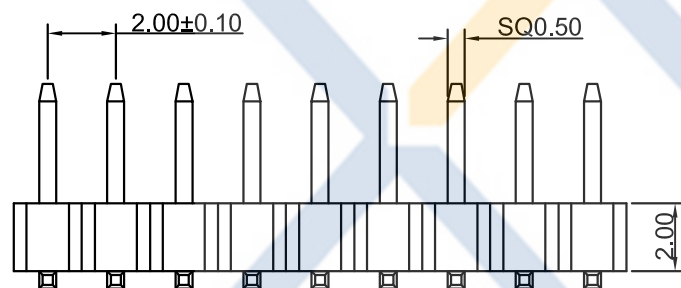


DRAWING FOR CUSTOMER

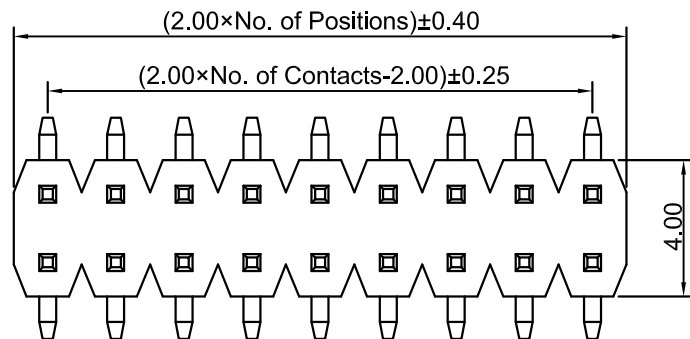

Recommended PCB Board Hole Layout
(Tolerance: ±0.05)

Specifications

Current Rating: 2.0A AC,DC

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/minute

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass

Insulation Material: Plastic

Plating : Gold flash or Tin

KB931-D XX X S V 5 A

D: Double row

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

A:TRAY (盒装)

Version

Mold No.

R:Right Angle

V:Vertical

S:SMT

D:DIP

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差	DRAWING 設計者	John	KB931-DXXXSV5A			
2013-07-08	A	CHANGE HISTORY 變更歷史	KB931-DXXXSV5A	John	CHECKED 審查	Thomas	PART NO. 料號			
DATE 日期	VER 版本				DRAWING 變更者	APPROVED 核准	William	DWG NO. 圖號	PE1709009A	UNIT 單位
										mm
1	2	3	4	.X=±0.30 .XX=±0.20 .XXX=±0.10			PRODUCT NAME 產品名稱	PH2.00 HEADER Double Row SMT Vertical Type		

