

# DRAWING FOR CUSTOMER

KB518- 30 S 2 A


Pin No.                      Version  
Shell                              Mold No.

■NOTES:

■Material: see table

■Finish:

- Terminal: Au plating 1~3u" over Nickel underplating 50u" min on the contac area, and Gold flash over Nickle underplating 50u" min on the solder area.
- Lower shell: Tin plating 120u" min underplating Nickel 50u min.
- Upper shell: Nickel 30u" min.
- Dielectric withstand voltage: 150V AC for 1 minute
- Current: 0.7A AC,DC per contac.
- Applicable cable: discrete cable (AWG#32~AWG#36)  
micro coaxial cable (AWG#36~AWG#44)

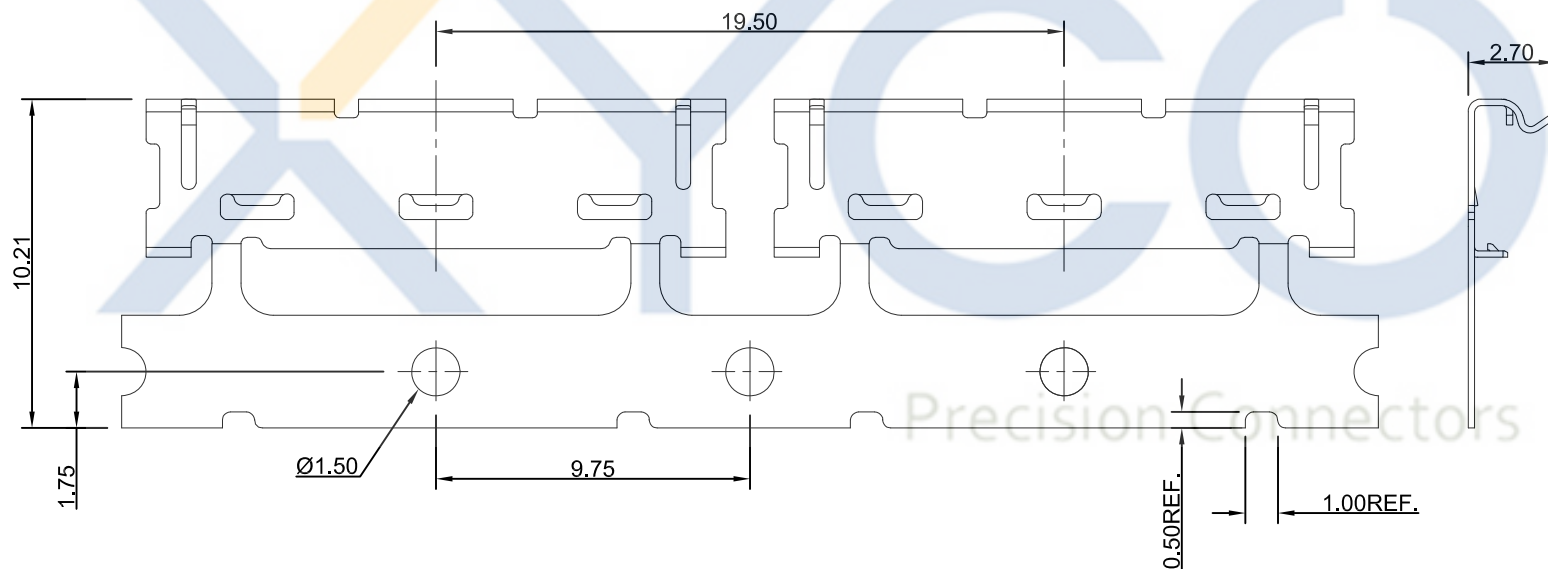

**XYCO** PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	John	KB518-30S2A	
2014-05-27	A		KB518-30S2A	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE09115A

UNIT 單位	mm	PRODUCT NAME 產品名稱	LVM PH0.5 Shell
------------	----	----------------------	-----------------