


DRAWING FOR CUSTOMER


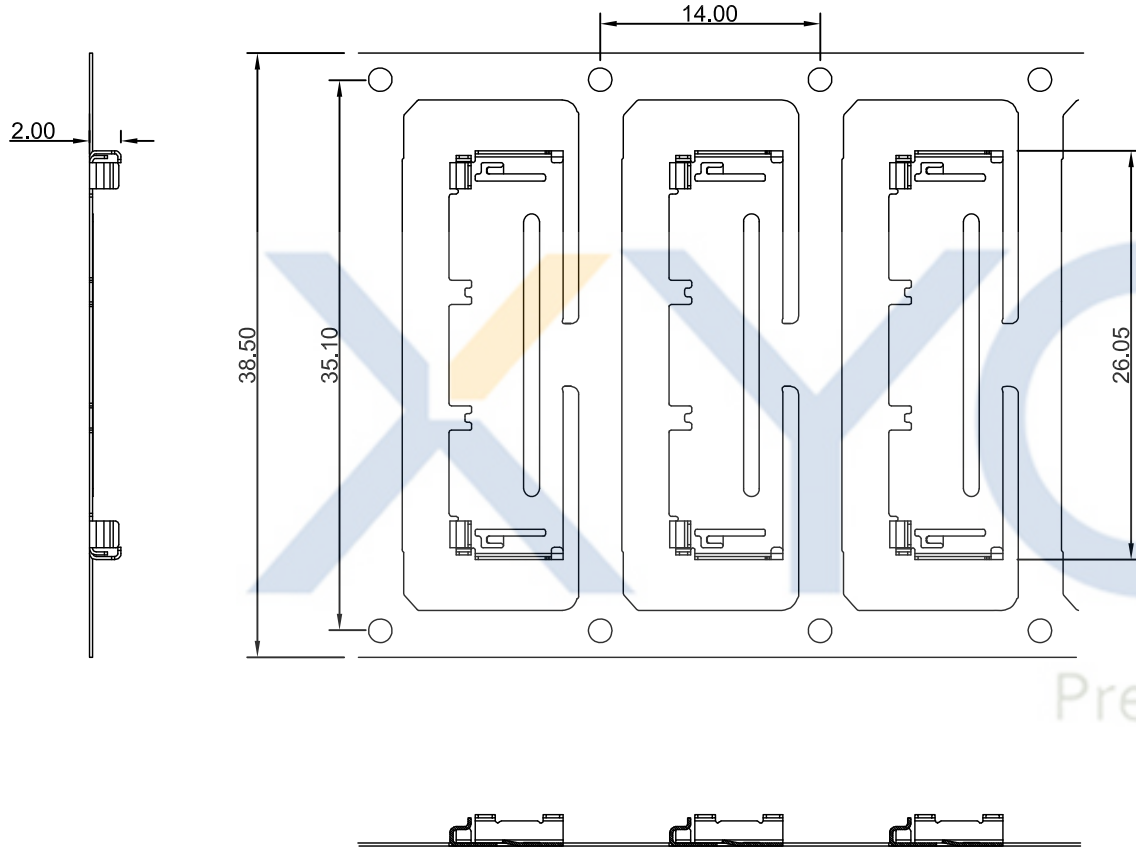


■Specifications :

- Current : Rating : 0.2~0.3A AC/DC
- Voltage Rating : 50V AC/DC
- Contact Resistance : 80m Max.
- Dielectric Withstanding Voltage: 150V AC/DC
- Insulation Resistance: 250M MIN
- Operating Temperature: -55°C to +85°C

■Material:

- Shell : Copper alloy ,T=0.20mm
- Camber: 10mm(Max.) per 1 meter.
- All Undimension radius is 0.15mm MAX.
- Twist: 10°(Max.) per 1 meter.
- Burrs not to exceed 0.03mm

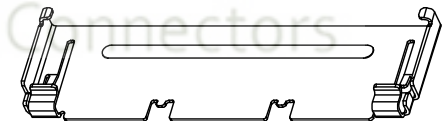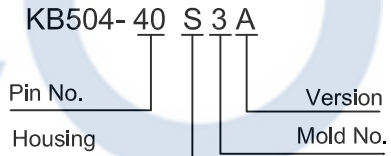

3D VIEW

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

				TOLERANCE 公差		DRAWING 設計者		John		KB504-40S3A	
2013-04-15		A		.X=±0.30 .XX=±0.20 .XXX=±0.10		CHECKED 審查		Thomas		PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	APPROVED 核准		William		DWG NO. 圖號	PE1206A	UNIT 單位
1	2	3	4	5	6	7	8	9	mm	PRODUCT NAME 產品名稱	HONDA LVD PH0.5mm connector Upper shell