




DRAWING FOR CUSTOMER




KB971-02H3A-XX
双孔防呆(旧模)




KB971-02H3B-XX
单孔防呆(新模)






KB971-03H3A-XX



KB971-04H3A-XX

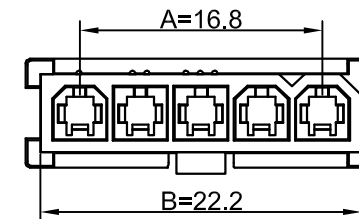

KB971-05H3A-XX

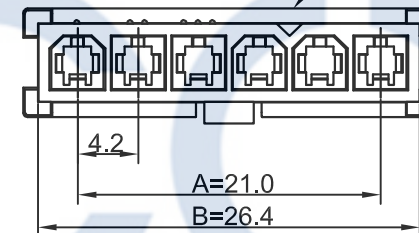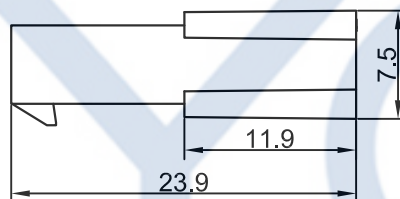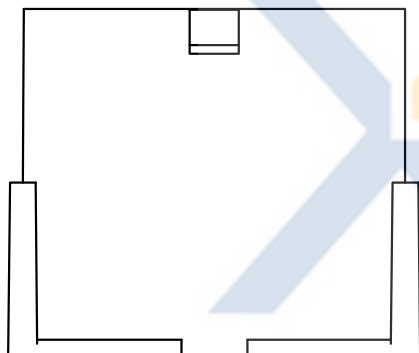

KB971-06H3A-XX

6P 产品在订购时
请确认端口形状

■SPEC.:

- Rated Voltage:300V AC,DC
- Rated Current:9A AC,DC
- Withstand Voltage:1500V AC/minute
- Insulation Resistance:1000MΩ min
- Contant Resistance:15mΩ Max.
- Temperature Range:-25℃~+85℃

■Notes:


- Material:Nylon66 UL94-V0/V2
- Color:TP:Transparent
- BK:Black

KB971- XX H 3 X-XX

Pin No.
Housing

Color
Version
Mold No.

Poles	Dimensions(mm)	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

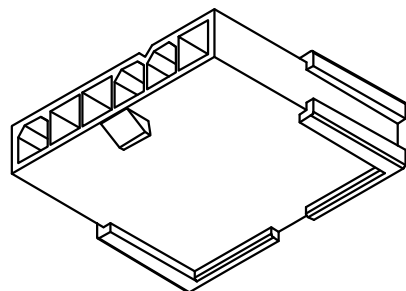

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-04-18	B	优化产品, 2PIN单孔防呆; 方便区分第一PIN脚(新模)	KB971-XXH3B-XX	Devin	TOLERANCE 公差	DRAWING 设计者	Devin	KB971-XXH3X-XX		UNIT 单位	mm	PRODUCT NAME 产品名称	5559 4.2mm Single Row Housing-Female
2013-07-30	A		KB971-XXH3A-XX	Devin	. X=±0.30 . XX=±0.20 . XXX=±0.10	CHECKED 审查	Thomas	PART NO. 料号					
DATE 日期	VER. 版本	CHANGE HISTORY 变更历史	CHANGED NAME 修改後料號	DRAWING 变更者		APPROVED 核准	William	DWG NO. 图号	PE1903004A				