


DRAWING FOR CUSTOMER

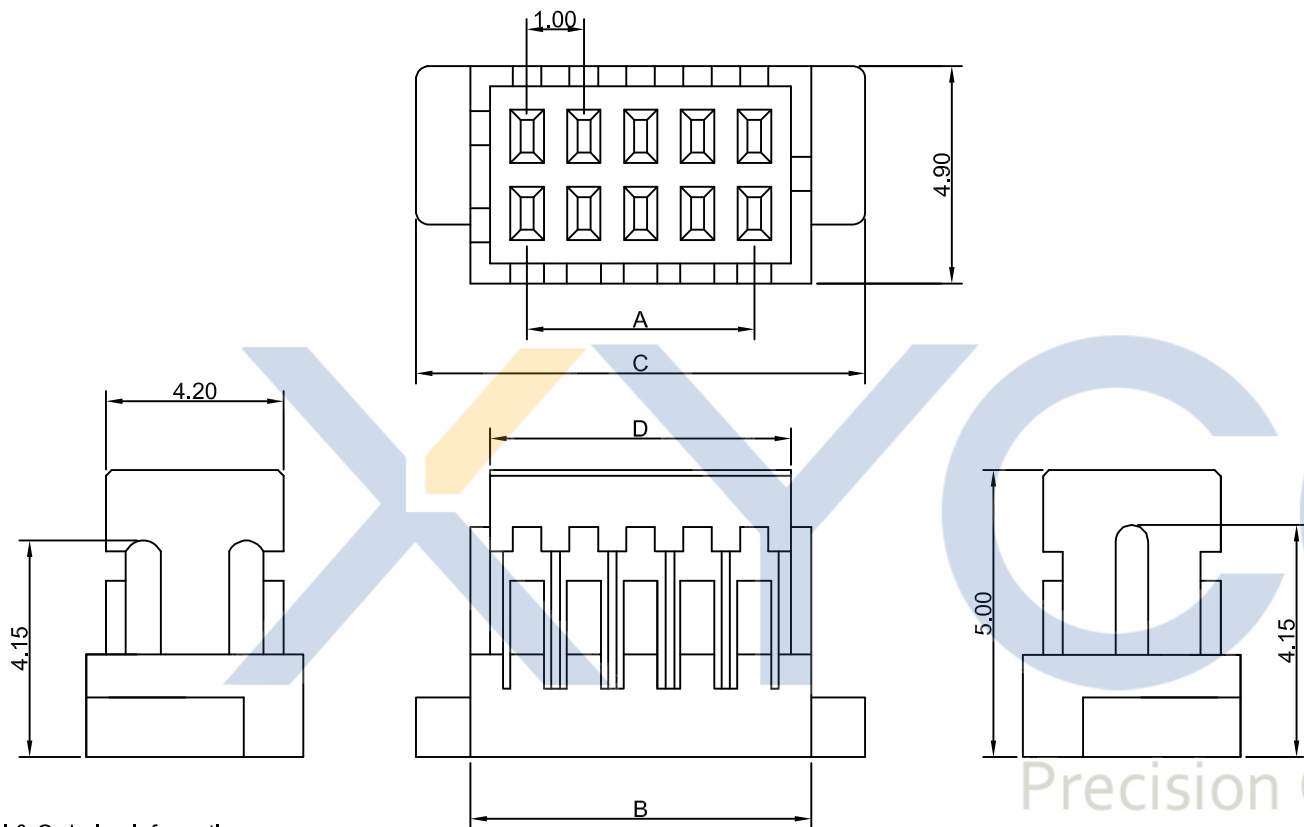


Specifications:

- Rated Voltage: 50V AC,DC
- Rated Current: 1A
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ, (MAX.)
- Insulation Resistance: 100MΩ, (MIN.)
- Temperature Range: -25°C~+85°C

Material and Finish:

- Circuits: 10,20,30,40,50
- Color: natural(white)
- Material: PBT UL94V-0
- Use With: KB901-1XTXX
- Mates With: KB901-DXXXSVXX;
KB901-DXXXSRXX

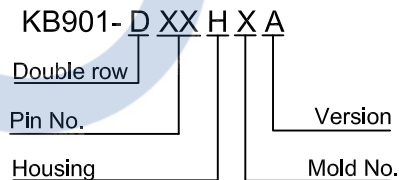

Dimensional & Ordering Information:

Circuits	Part No.	Dimension mm			
		A	B	C	D
10	KB901-D10H4A	5.0	6.2	8.0	5.37
20	KB901-D20H4A	9.0	11.2	13.0	10.37
30	KB901-D30H4A	14.0	16.2	18.0	15.37
40	KB901-D40H4A	19.0	21.2	23.0	20.37
50	KB901-D50H4A	24.0	26.2	28.0	25.37

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2012-03-19	A		KB901-DXXHXA	譚火秦	TOLERANCE 公差	DRAWING 設計者	譚火秦	KB901-DXXHXA		UNIT 單位		mm	PRODUCT NAME 產品名稱	JST SH1.0mm wire to board double row Housing
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	彭太坤	PART NO. 料號	DWG NO. 圖號	PE2005A				
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15