DRAWING FOR CUSTOMER

KB918-XX X S R X A

- Pin No.
- T:TUBE 管裝 / R:REEL 卷裝 / P:PE 袋裝
- D:DIP / S: SMT
- R:Right Angle / V:Vertical
- Mold No.
- Version

■SPEC.:
- ●Rated Voltage:50V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:30mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-25℃~+85℃

■Wafer
- ●Material: PA9T UL94V-0
- ●Contact PIN: Phosphor Bronze
- ●Solder tab:Phosphor Bronze

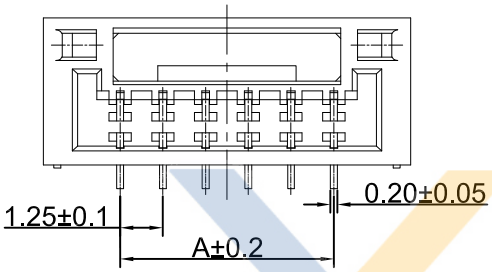

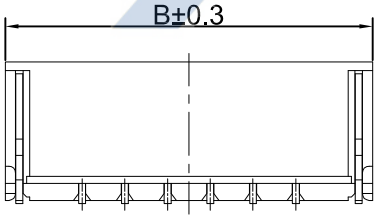



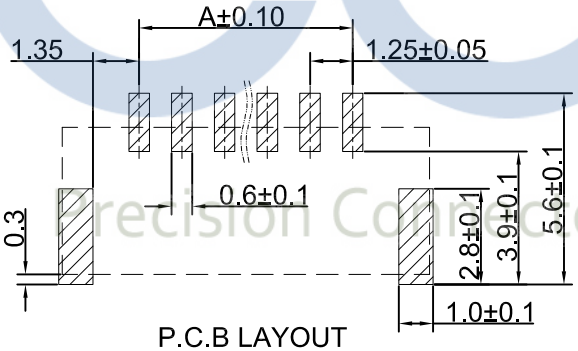

P.C.B LAYOUT

Poles	DIM.A	DIM.B
2P	1.25	5.75
3P	2.50	7.00
4P	3.75	8.25
5P	5.00	9.50
6P	6.25	10.75
7P	7.50	12.00
8P	8.75	13.25
9P	10.00	14.50
10P	11.25	15.75
11P	12.50	17.00
12P	13.75	18.25
13P	15.00	19.50
14P	16.25	20.75
15P	17.50	22.00

XYCO Precision Connectors

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-06-12	A		KB918-XXXSRXA	刘造强

TOLERANCE 公 差	DRAWING 設計者	刘造强	KB918-XXXSRXA
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	彭太坤	PART NO. 料號
	APPROVED 核准	谭宏	DWG NO. 圖號 PE1708005A

UNIT 單位: mm

PRODUCT NAME 產品名稱: JST GHR1.25mm Wire To Board SMT Right Angle Wafer