
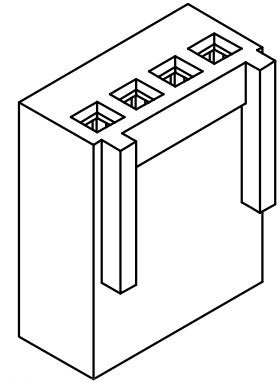


DRAWING FOR CUSTOMER

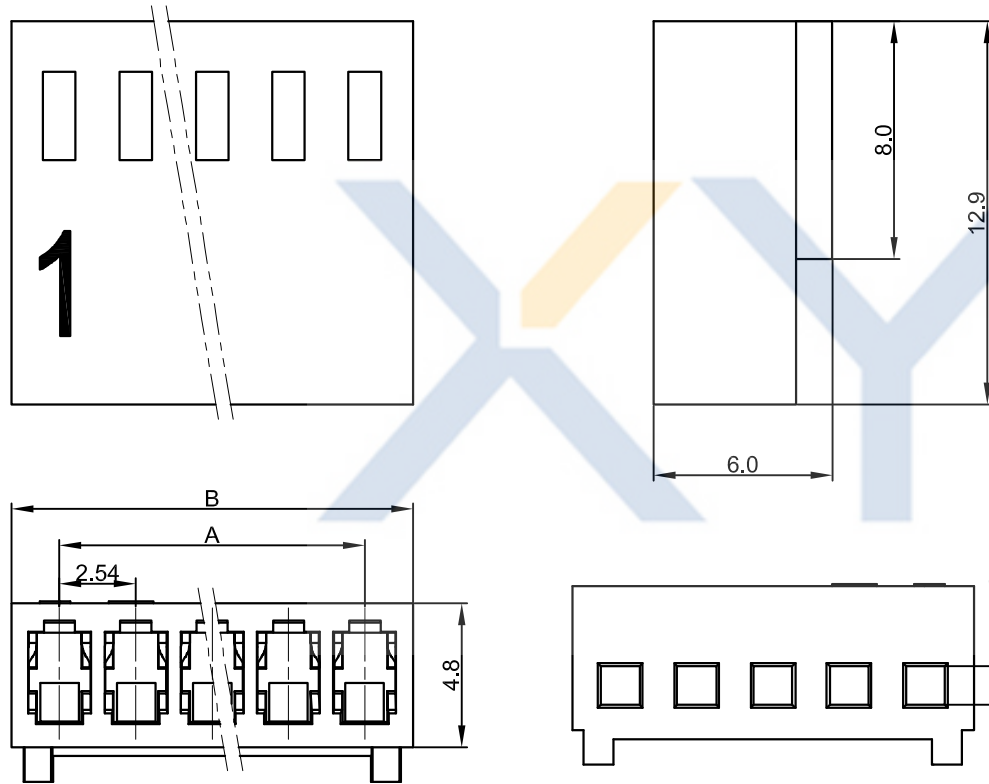

■SPEC.:

- Voltage Rating:250V AC/DC
- Current Rating:3A AC/DC
- Withstanding Voltage:1000V AC/Minute
- Insulation Resistance:1000MΩ Min
- Temperature Range:-25°C to+85°C
- Contact Resistance:10mΩ max.

■Housing

- Material: PA66 UL94-V0
- Color:White

KB953-XX H 3 X

Pin No.

Version

Housing

Mold No.

C有两种尺寸:
1.3为KB953-XXH3A
1.0为KB953-XXH3B

Part No.	Dimensions(mm)	
	A	B
2	2.54	5.76
3	5.08	8.30
4	7.62	10.84
5	10.16	13.38
6	12.70	15.92
7	15.24	18.46
8	17.78	21.00
9	20.32	23.54
10	22.86	26.08
11	25.40	28.62
12	27.94	31.16
13	30.48	33.70
14	33.02	36.24
15	35.56	37.78
16	38.10	41.32

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2013-09-13		A	KB953-XXH3X		Devin	TOLERANCE 公差		DRAWING 設計者 Devin		KB953-XXH3X		UNIT 單位 mm		PRODUCT NAME 產品名稱		2510 PH:2.54mm Wire To Board Housing	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	APPROVED 核准	Thomas	William	DWG NO. 圖號	PE1905032A	PART NO. 料號					